



MOLDING:
YUS-28


DATE	REV.	REVISION	DRAFTING	CHECKED
2019.08.02	A/0	NEW	LM	YB

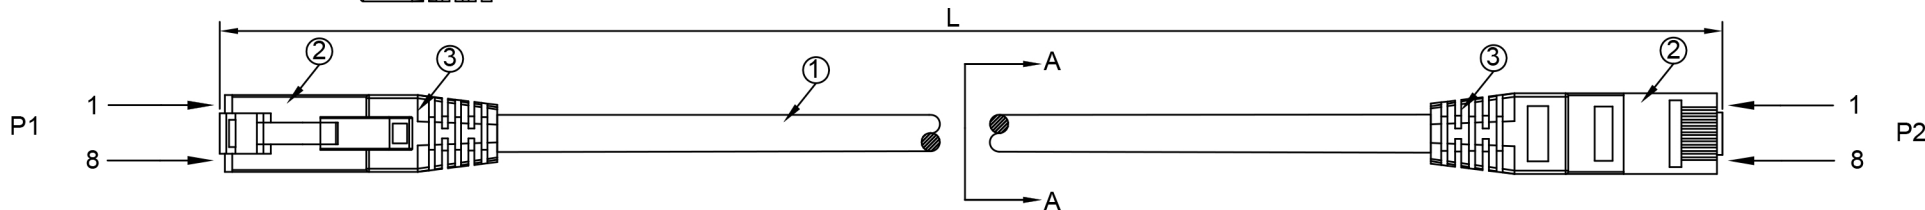

(FP0253)INK MARKING:OXnet CAT.5E FTP PATCH 3P VERIFIED TO ANSI/TIA-568-C.2 & ISO/IEC 11801 ED.2 & EN 50288-2-2 & IEC 60332-1-2 26AWGX4P



Note:
L=250MM Without winding

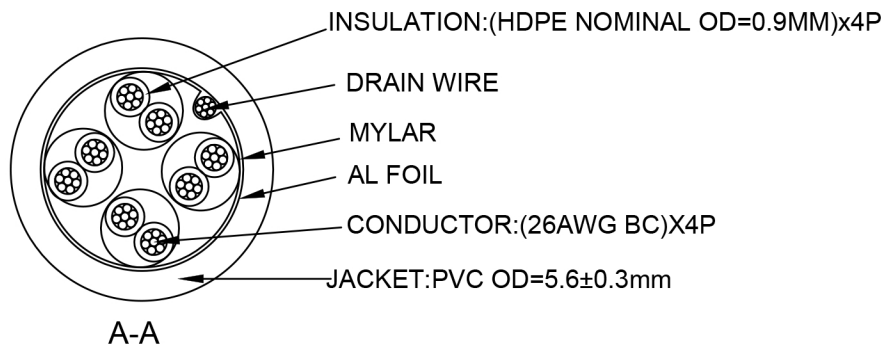

P1	PINOUT/COLOR (T568B)	P2
1	WHITE/ORANGE	1
2	ORANGE	2
3	WHITE/GREEN	3
6	GREEN	6
5	WHITE/BLUE	5
4	BLUE	4
7	WHITE/BROWN	7
8	BROWN	8
SHIELD	DRAIN	SHIELD

L(MM)	T(MM)	L(MM)	T(MM)
250	±20	5000	±80
500	±20	7000	±100
1000	±30	10000	±100
2000	±30	15000	±150
3000	±30	/	/



③	MOLD	70P PVC								AR	Unless specified on the drawing, tolerances are per the follows: X. ±0.20 X° ±3 .X ±0.10 .X° ±0.3 .XX ±0.05	DRAW. NO	GWFC-S190261	TITLE	Cat.5E F/UTP 26AWGx4P PVC					
②	PLUG	8P8C 50U" RJ45								2		CUSTOMER	Westech							
①	CABLE	Cat.5E F/UTP 26AWGx4P PVC								AR		CUST' R P/N		DRAW	LM	DATE	2019.08.02			
No.	TITLE	DESCRIPTION								Q'TY		SCALE		CHECK		DATE	2019.08.02			
Material			Part Number			Note	☒ RoHS	☒ Reach	☐ GP	☐ HF	☐ Other	WC			UNIT	mm	APPROVED	CQ	SHEET	1 OF 1