



MOLDING:

YU-14


DATE	REV.	REVISION	DRAFTING	CHECKED
2019.08.02	A/0	NEW	LM	YB

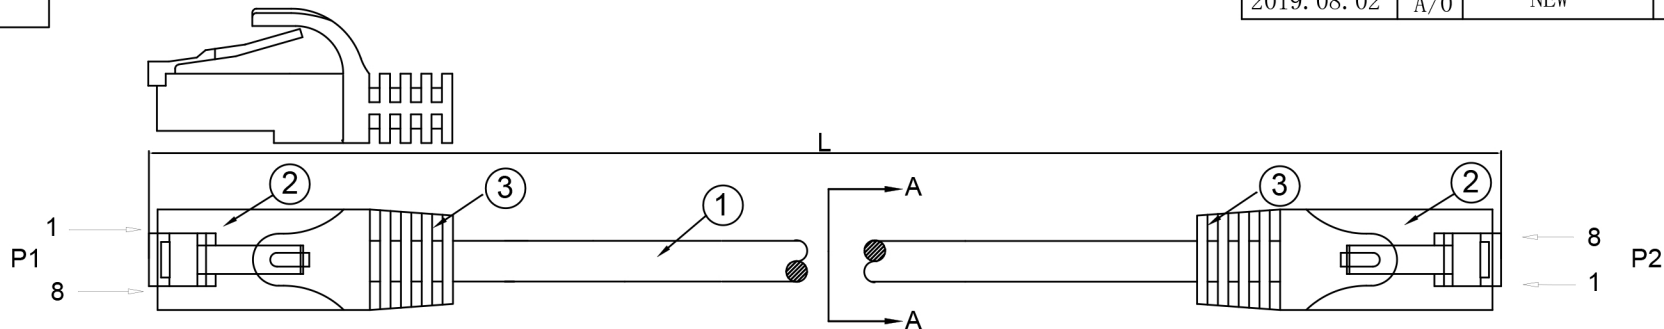

(FP0251)INK MARKING:OXnet CAT.5E UTP PATCH ETL/3P VERIFIED TO ANSI/TIA-568-C.2 & ISO/IEC 11801 ED.2 & EN 50288-3-2 & IEC 60332-1-2 24AWGX4P



Note:
L=250MM Without winding

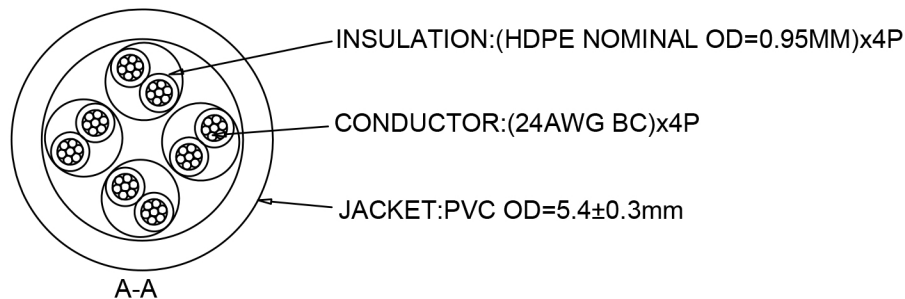

P1	PINOUT/COLOR (T568B)	P2
1	WHITE/ORANGE	1
2	ORANGE	2
3	WHITE/GREEN	3
6	GREEN	6
5	WHITE/BLUE	5
4	BLUE	4
7	WHITE/BROWN	7
8	BROWN	8

L(MM)	T(MM)	L(MM)	T(MM)
250	±20	5000	±80
500	±20	7000	±100
1000	±30	10000	±100
2000	±30	15000	±150
3000	±30	/	/



- Note:
- 1.Channel Test
 - 2.100% Test(Open,short,miss wire)
 - 3.Contact Resistance:2 ohm max.
 - 4.Insulation Resistance:DC/250V,10M ohm min. For 0.01s
 - 5.Withstand Voltage:AC/250V 5mA Max. For 0.01s

③	MOLD	70P PVC	AR	Unless specified on the drawing, tolerances are per the follows:		DRAW. NO	GFWC-S190259	TITLE	Cat.5E U/UTP 24AWGx4P PVC					
②	PLUG	8P8C 50U" RJ45	2			CUSTOMER	Westech							
①	CABLE	Cat.5E U/UTP 24AWGx4P PVC	AR			CUST' R P/N		DRAW	LM	DATE	2019.08.02			
No.	TITLE	DESCRIPTION		Q'TY			SCALE	CHECK	YB	DATE	2019.08.02			
Material	Part Number	Note	<input checked="" type="checkbox"/> RoHS	<input checked="" type="checkbox"/> Reach	<input type="checkbox"/> GP	<input type="checkbox"/> HF	<input type="checkbox"/> Other	WC	UNIT	mm	APPROVED	CQ	SHEET	1 OF 1